




Silevo's proprietary hybrid tunneling junction cell technology combines **High Efficiency**, **Exceptional Energy Harvest**, and **Manufacturing Excellence** to deliver maximum return for your solar investment.

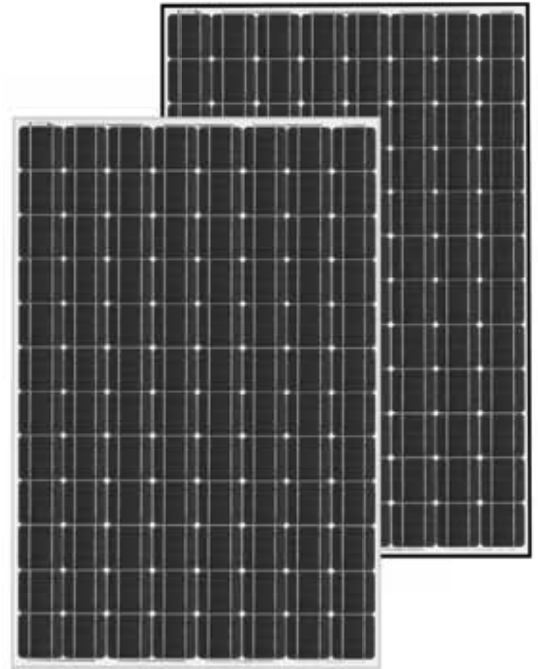

18.3% = Superior Efficiency

With efficiencies up to 18.3%, Silevo's Triex solar modules are amongst the highest in the industry. Higher efficiency delivers more power in less space.



-0.27%/°C + ARC = More Energy Output

Triex solar modules can generate up to 12% more energy than conventional solar modules due to their low temperature coefficient which aids performance in warm weather, and anti-reflective glass which boosts performance in low-light conditions.



6 Steps | Cu = Manufacturing Excellence

Silevo's Triex technology incorporates premium materials with 6 core automated manufacturing steps to deliver value and performance. Triex modules are virtually LID & PID-free.

Silevo's Triex U-Series solar modules incorporate 96 individual hybrid tunneling-junction solar cells which deliver high performance and reliability. Designed to meet the demanding requirements of commercial and utility-scale solar projects, U-Series modules can also be used in high performance residential applications. Available with either silver or black frame option.


TRIEX U305 WATT 18.3%

25 year linear power warranty & **10 year** product warranty

ISO 9001 & 14001 certified production facility.

IEC 61215, IEC 61730 & UL 1703 certified. Salt Mist test severity Level 1 certified.

DAILY POWER ADVANTAGE

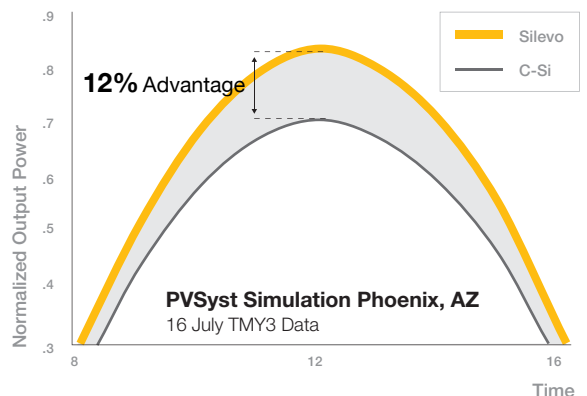

Triex™ U305 Watt, 18.3% Module

Electrical Data (at STC)

Note: STC: Air Mass 1.5, Irradiance 1000W/m², cell temperature 25C

	U290	U295	U300	U305
Maximum Power (Pmax) [W]	290	295	300	305
Max Power Voltage (Vmp) [V]	56.2	56.6	57.0	57.5
Max Power Current (Imp) [A]	5.19	5.23	5.27	5.32
Open Circuit Voltage (Voc) [V]	68.9	69.2	69.5	69.8
Short Circuit Current (Isc) [A]	5.59	5.62	5.65	5.68
Output Power Tolerance [Wp]	0/+5	0/+5	0/+5	0/+5
Total Area Module Efficiency	17.4%	17.7%	17.9%	18.3%

Electrical Data (at NOTC)

Note: NOTC: Air Mass 1.5, Irradiance 800W/m², Air temperature 20C, Wind speed 1m/ss


	U290	U295	U300	U305
Maximum Power (Pmax) [W]	213.1	216.3	219.5	223.6
Max Power Voltage (Vmp) [V]	52.0	52.4	52.7	53.2
Max Power Current (Imp) [A]	4.10	4.13	4.16	4.20
Open Circuit Voltage (Voc) [V]	64.0	64.3	64.5	64.8
Short Circuit Current (Isc) [A]	4.47	4.50	4.52	4.55

Electrical Data (at Low Irradiance)

Note: Low irradiance: Air Mass 1.5, Irradiance 200W/m², cell temperature 25C

	U290	U295	U300	U305
Maximum Power (Pmax) [W]	56.6	57.2	57.8	58.3
Max Power Voltage (Vmp) [V]	53.4	53.7	53.9	54.1
Max Power Current (Imp) [A]	1.06	1.07	1.07	1.08
Open Circuit Voltage (Voc) [V]	64.8	65.0	65.3	65.6
Short Circuit Current (Isc) [A]	1.14	1.15	1.15	1.16

I-V Curve U305

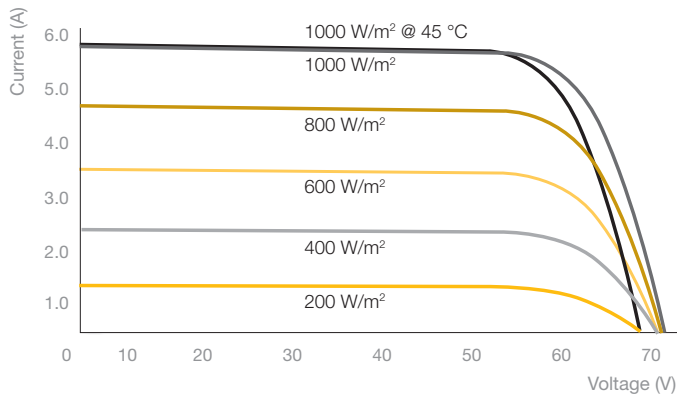

Certifications

Fire Safety Classification	Class C
Certifications	UL 1703, CEC, IEC61215, IEC61730

Warranty

Warranty	10 Year Limited Product Warranty
Performance Guarantee	25 Year linear (please refer to warranty for details)

Temperature Ratings

Temperature (NOCT) [C]	46+/-2
Temperature Coefficient Pmax [%/°C]	-0.27
Temperature Coefficient Voc [%/°C]	-0.262
Temperature Coefficient Isc [%/°C]	0.04

Maximum Ratings

Maximum System Voltage [V]	1000V DC (IEC) / 600V DC (UL)
Maximum Fuse Rating	12A
Temperature	Negative 40°C to Positive 85°C

Mechanical Data

Solar Cells	96 Triex 125mm x 125mm cells
Dimensions	1586mm x 1056mm x 40mm
Weight	19 kgs
Front Glass	ARC 3.2mm High Transmission Tempered
Front Load Test (Snow)	5400 Pa
Rear Static Load Test (Wind)	2400 Pa
Junction Box	IP65 rated with 4 bypass diodes
Output Cables	1000mm / MC4 Connectors
Frame	Black Aluminum (Silver option)

Packaging Data

Modules per Pallet	25
Modules per 40' GP Container	350
Modules per 40' HQ Container	700

Dimensions

