




51V STANDARD SERIES



PART NUMBER: 51V110A-8D-MODULE

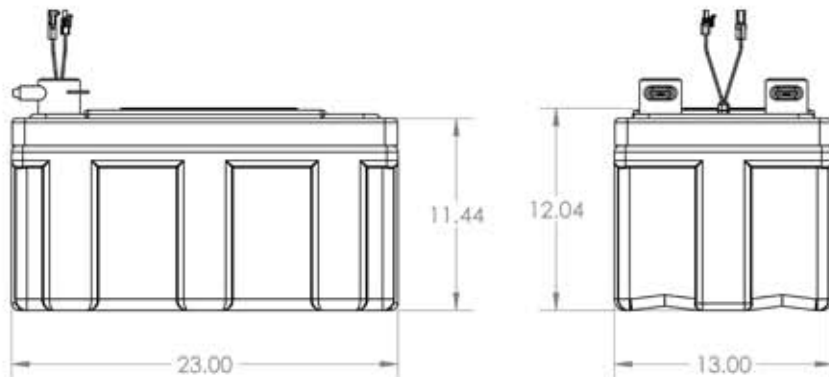

51V110A-8D-MODULE Deep Cycle+Engine Start Lithium Battery
Battery Specification

Attribute		Value	
Nominal True Capacity	110	Amp Hours	
Charging Voltage	56.8 to 58.4	Volts	
Nominal Voltage	51.2	Volts	
Cut-off Discharge Voltage	48.0	Volts	
Reserve Capacity	264	Minutes	
Max Discharge Current (Continuous)	200	Amps	
Max Discharge Current (Pulse)	550	Amps	
Max Continuous Charge Current	100	Amps	
Internal Impedance	< 8	Milliohms	
Cycle Life @ 100% Depth of Discharge	2000-3000		
Dimensions (L x W x H)	23.0 x 13.0 x 12.0	Inches	
Weight	144 (65.3)	Pounds (kg)	
Safety Leader U.N. International Approved	U.N. D.O.T. 38.3	Lithium	
Charge Temperature	32 to 113	Fahrenheit	
Discharge Temperature	-4 to 140	Fahrenheit	
Storage Period (1 month)	-4 to 113	Fahrenheit	
Storage Period (6 month)	-4 to 77	Fahrenheit	
Battery Terminals (Max Torque 180in-lbs)	3/8"	Terminal	
Lithionics NeverDie Feature	YES	External	
Active Shunt Cell Balancing	YES		
Wireless NeverDie Remote	YES	Optional	

WATTS OF ENERGY

5632 WATT-HOURS

144 LBS

65.3 KG

NOTE: Contact Lithionics Battery for a user installation Guide. Follow the guide to ensure fitness of use and warranty.

Warning:

- Lithium batteries are not designed for under-hood installations adjacent to a radiant heat source, such as an engine. Lithium batteries are not designed for use in sub-freezing temperatures. See USER GUIDE for acceptable temperature ranges. Contact Lithionics Battery for details on cold weather package.
- Industry standards have not been developed for ratings such as lithium cranking amperage equivalents to lead-acid cranking amperage ratings. It is the responsibility of the end-user to select the correct sized battery for his/her application. Lithionics Battery offers a wide range of lithium cells to assist in the customer's selection of the battery size.
- Installation: It is recommended that batteries be installed terminals facing up. Terminal must never face down (upside-down installation). Contact Lithionics Battery for approval of alternative installation orientations that maybe possible in your application.

External NeverDie Features (Required to Function Properly)

- Reserve Capacity (Low Voltage Cutoff @ 48V)
- Pushbutton Storage Option
- Active Shunt Cell Balancing
- Individual Cell Monitoring (Temp & Voltage)
- Charge Enable (50V)
- Overtemp Protection (Enabled @ 140F/60C)
- Over-Discharge Protection (Dead Voltage Lockout @ 40V)
- Over-Charge Protection (High Voltage Cutoff @ 62.4V)
- Short Circuit Protection

EXTERNAL BMS REQUIRED

